


## RICOH IM 430F

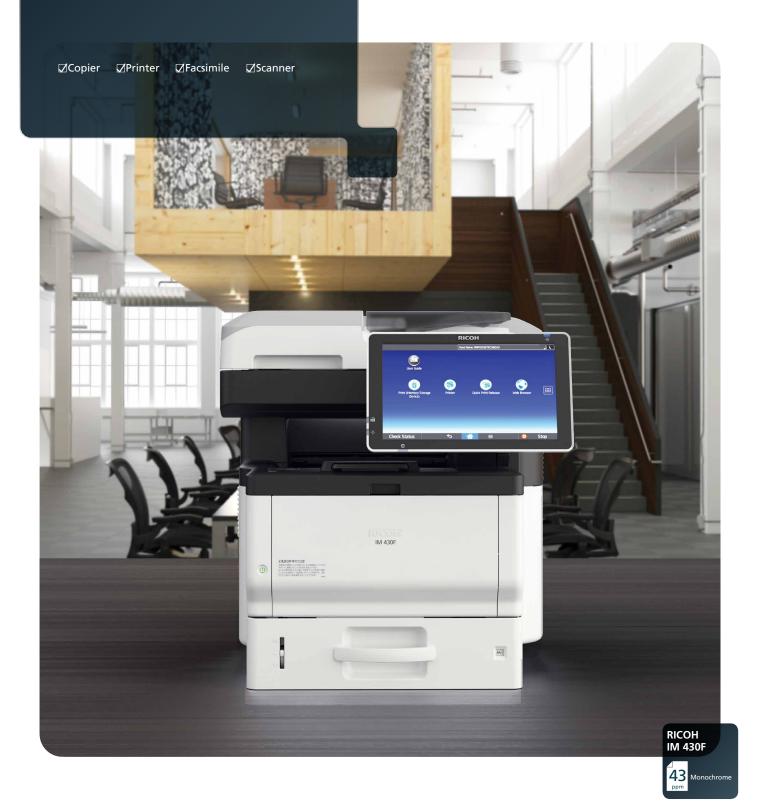

### **Compact and Durable**

# The intelligent A4 mono multifunction printer to empower your workplace

#### Punching above its weight

Designed with space maximisation in mind, at 476mm (W) x 442mm (D), RICOH IM 430F features print speed at 43 pages per minute, with maximum paper input capacity at 2,100 sheets (including bypass), supporting copying, printing, scanning, faxing, stapling and RICOH office solutions. It is a device suitable for deployment on desks or in small spaces, a multi-tool to power your dynamic workplace.





#### Security in our DNA

Recognising your modern business security challenges, RICOH IM 430F ensures business information remains secure with robust security layers in place. Document confidentiality can be maintained by suspending print jobs, and only be released when authentication is done at the device. Network encryption ensures data transmission remains safe. RICOH IM 430F is equipped with Trusted Platform Module (TPM) that validates programs and firmware, preventing device boot up, if compromise is detected.

Learn more about RICOH's Security layers: https://www.ricoh.com/products/security/mfp/

#### Intuitive experience

Equipped with a 10.1" Smart Operation Panel (SOP), RICOH IM 430F allows you to experience an intuitive operating experience. Applications and functions are seamlessly integrated, with easy-to-understand interface. Furthermore, the SOP can be customised to match your usage behaviour, allowing RICOH IM 430F to become your dependable print partner.



#### **RICOH IM 430F**

MAIN SPECIFICATIONS

| MODEL  | RICOH IM 430F  |
|--|--|
| GENERAL  |  |
| Functions  | Copy, Print, Scan, Fax   |
| Operation panel  | Copy in this cash, task  |
| Warm-up time   | 22 seconds   |
| First output speed : B/W   | 4.5 seconds  |
| Continuous output speed  | 43 ppm   |
| CPU  | Intel <sup>®</sup> Atom Processor Bay Trail-I 1.46GHz  |
| Memory   | CGB standard/maximum   |
| HDD  | 320GB standard/maximum   |
| SPDF capacity  | 50 sheets  |
| Weight (Mainframe)   | 30.5kg   |
| Dimensions (W x D x H)   | Standard: 476mm x 442mm x 510mm<br>Maximum: 614mm x 508mm x 949mm  |
| Power source   | 220-240V, 7A, 50/60Hz  |
| COPIER   |  |
| Multiple copying   | Up to 999 copies   |
| Resolution   | 600 x 600 dpi  |
| Zoom   | From 25% to 400% in 1% steps   |
| PRINTER  |  |
|  | Standard: PCL5e, PCL6, PostScript3 (Emulation), PDF Direct (Emulation)   |
| Printer language Print resolution  | Option: Genuine Adobe <sup>®</sup> Postscript <sup>®</sup> 3 <sup>TM</sup> , XPS, IPDS, PDF Direct from Adobe <sup>®</sup><br>1,200 x 1,200 dpi  |
| Network interface : standard   | Mainframe: Ethernet 10 base-T/100base-TX/1000 base-T, USB Host 2.0.<br>Smart Operation Panel: SD card slot, USB Host Type A—USB Flash memory, USB Host Type A—camera, USB Host Type mini B—for NFC card reader                             |
| Network interface : option, maximum 1  | USB Device Server (additional Ethernet/Gigabit Ethernet port), IEEE 802.11a/b/g/n (Wireless LAN), IEEE 1284, Extended USB board, File format converter   |
| Mobile printing capability   | RICOH Smart Device Connector, Apple AirPrint <sup>®</sup> , Mopria <sup>®</sup> , NFC  |
| Windows <sup>®</sup> environments  | Windows <sup>®</sup> 7/ 8.1/10, Windows <sup>®</sup> Server 2008/2008 R2/2012/2012 R2 2016   |
| Mac OS environments  | Windows // a.i/10, Windows server 2008/2012/2012/22/12/22/2018   |
| UNIX environments  | UNIX Sun <sup>®</sup> Solaris, HP-UX, SCO OpenServer, RedHat <sup>®</sup> Linux, IBM <sup>®</sup> AIX  |
| SAP <sup>®</sup> environments  | SAP® R3 <sup>®</sup> , SAP <sup>®</sup> R4 <sup>®</sup>  |
| Other supported environments   | išeries/A5/400   |
| SCANNER  | 12 HEJAG HOU   |
| Scanning speed   | 40ipm (Simplex) / 80ipm (Duplex)   |
| Resolution   | 600 dpi maximum  |
| Compression method   | TIFF (MH, MR, MMR, JBIG2), Grayscale, JPEG   |
|  | Single Page TIFF, Multi Page TIFF, Single Page JPEG, Single Page PDF, Multi Page PDF, Single Page High Compression PDF,  |
| File formats   | Multi Page High Compression PDF, Single Page PDF-A, Multi Page PDF-A   |
| Scan modes   | Email, Folder, USB, SD Card  |
| FACSIMILE  | 4  |
| Circuit  | PSTN, PBX  |
| Transmission speed   | 2 seconds  |
| Modem speed  | 33.6 Kbps maximum  |
| Resolution   | 8 x 3.85 line/mm, 200 x 100dpi<br>8 x 7.7 line/mm, 200 x 200dpi  |
| Compression method   | MH, MR, MMR, JBIG  |
| Memory   | 4MB standard   |
| SECURITY   |  |
| Features   | Locked Print, SSL communication encryption, S/MIME, IPsec communication, Transport Layer Security (TLS), SMTP over SSL/TLS, Wireless LAN encryption, Network Protocol, IP filtering, Trusted Platform Module, DataOverwriteSecurity System |
| PAPER HANDLING   |  |
| Recommended paper size   | A4, A5, A6, B5, B6, Custom size paper  |
| Paper input capacity   | Standard: 500 sheets (excluding bypass 100 sheets)<br>Maximum: 2,100 sheets (including bypass 100 sheets)  |
| Paper output capacity  | 250 sheets standard/maximum  |
| Paper weight   | Trays: 52 - 220g/m², Bypass: 52 - 256g/m², Duplex: 52 - 162g/m²  |
| Paper types  | Plain Paper, Recycle Paper, Special Paper, Color Paper, Letterhead, Preprinted Paper, OHP, Label Paper, Envelope   |
| ECOLOGY  |  |
| Power consumption  | Maximum: 1,290W<br>Ready mode: 91.5W<br>Sleep mode: 0.79W  |
| TEC value  | 1.8 kWh  |
| INPUT TRAY AND FINISHER OPTIONS  |  |
| 3 x 250-sheet paper tray (PB1110)  | Paper size: A6-A4, Paper weight: 52 - 220g/m <sup>2</sup>  |
| 3 x 500-sheet paper tray (PB1120)  | Paper size: A6-A4, Paper weight: 52 - 220g/m <sup>2</sup>  |
| Offline stapler type M34   | Staple paper weight: 52-90g/m <sup>2</sup> , Staple positions: parallel with paper edge, at paper corner, Stapling capacity maximum: 20 sheets   |
| OTHER OPTIONS  |  |
| Caster Table Type M34, FAX Connection Unit Type M34, PostScript3 Unit Type M34, IPDS Unit Type P18, XPS Direct Print Option Type M34, OCR Unit Type M13, IEEE 1284 Interface Board Type M19, Extended USB Board Type M19, File Format Converter Type M19, IEEE 802.11 Interface Unit Type M24, USB Device Server Option Type M19A, Optional Counter Interface Unit Type M12, NFC Card Reader Type M27, Unicode Font Package for SAP <sup>®</sup> Licence |  |

CONSUMABLES (ISO/IEC 19752) Starter toner 17,400 pages Toner (K, Black) 17,400 pages



#### www.ricoh-ap.com

RICOH ASIA PACIFIC PTE LTD

103 Penang Road #08-01/07, VISIONCREST Commercial, Singapore 238467 Phone: +65 6830 5888, Fax: +65 6830 5830

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. The images in this brochure are not real photographs and slight differences in detail might appear. Copyright © 2020 Ricoh Asia Pacific Pte Ltd. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Asia Pacific Pte Ltd.

